


# Fresco — Ultrafabrics

**Fresco** boasts a texture reminiscent of leather across a palette of rich, classic neutrals. Combining style and functionality, Fresco is a breath of fresh air.

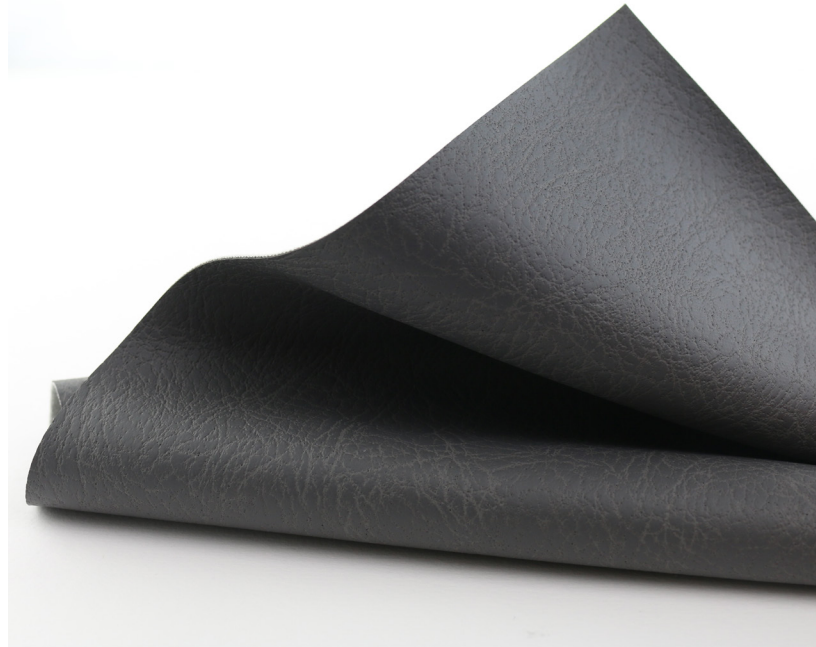


- 
- Superior durability – industry-leading 16 weeks hydrolysis results
  - Backcloth contains recycled polyester and responsibly sourced rayon. Each linear yard of Fresco contains 8 recycled plastic bottles.
  - 300,000 double rubs (Wyzenbeek), 160,000 rubs (Martindale)
  - Breathable technology promotes airflow for ultimate seating comfort
  - Bleach cleanable (1:5 bleach/water solution)
  - Notable acoustic properties, when paired with Novawall acoustical wall systems.\*

**An intelligent solution** – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel, and performance matter.

\* Only in North America



Acoustics\*



Breathable  
Comfort

# Fresco from Ultrafabrics

## Applications

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% Rayon Backing

### Weight:

Approx. 8.9 oz. Per Square Yard  
Approx. 300 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

5.51"V x 3.54"H / 140mm V x 90mm H

## Performance

### Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)\*

BS EN ISO 12947-2 / 160,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

\* Only in North America



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.

7/23

