


Summit — Ultrafabrics

Functionally designed, **Summit** defends against sunlight, moisture, and other elements, providing optimal protection and durability. Tone-on-tone colorations highlight its vintage appeal. An innovative fabric in both styling and performance, Summit will prove to be a hard-working performer in most seating applications.

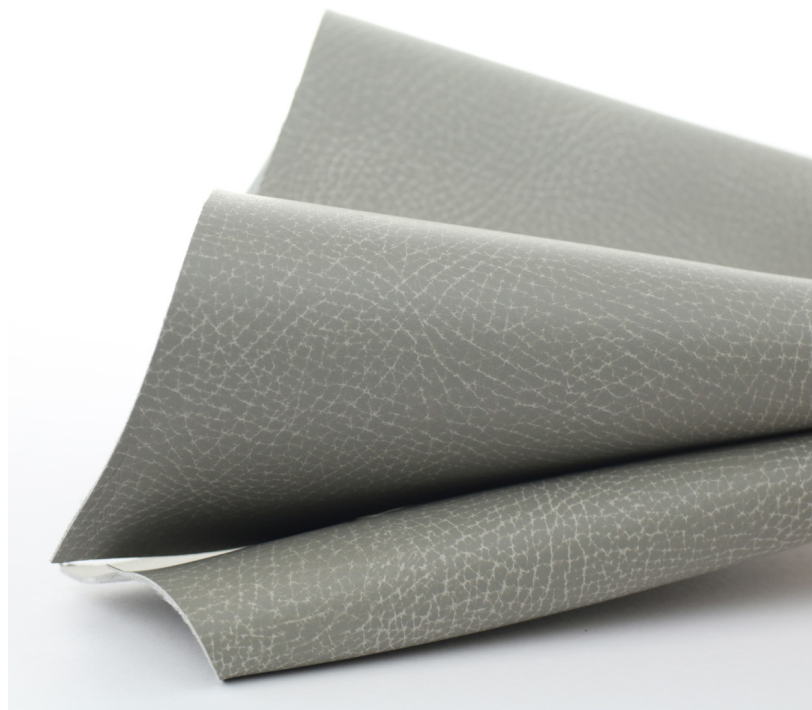


-
- Superior durability – industry-leading 16 weeks hydrolysis results
 - In pursuit of our goal to include at least 50% renewable and/or recycled resources across all collections, the backcloth of Summit will transition to include recycled polyester and responsibly sourced rayon.
 - 400,000 double rubs (Wyzenbeek), 160,000 rubs (Martindale)
 - EPA-registered antimicrobial protection does not contain triclosan and triclocarban
 - Bleach cleanable (1:5 bleach/water solution)
 - SCS Indoor Advantage Gold Certification

An intelligent solution – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel, and performance matter.

Not for use in marine or contract exterior applications.



Antimicrobial



Outdoor Living

Summit from Ultrafabrics

Application

Interior Upholstery, Exterior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 10.9 oz. Per Square Yard
Approx. 370 Grams Per Square Metre

Thickness:

Approx. 1.05 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Antibacterial: AATCC 147

Antimicrobial: ASTM E2180

Anti-mildew: ASTM G21

Cold Crack: FTM 5874 / CFFA 6a

Blocking: ASTM D751, 89-93

Colorfastness

Light:

ASTM G154, 1000 Hours
SAE J2527 1500 kj, Grade 4
ISO 105 B02, Grade 8

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.
7/23

