



# Ultraleather Pro IFR — Ultrafabrics

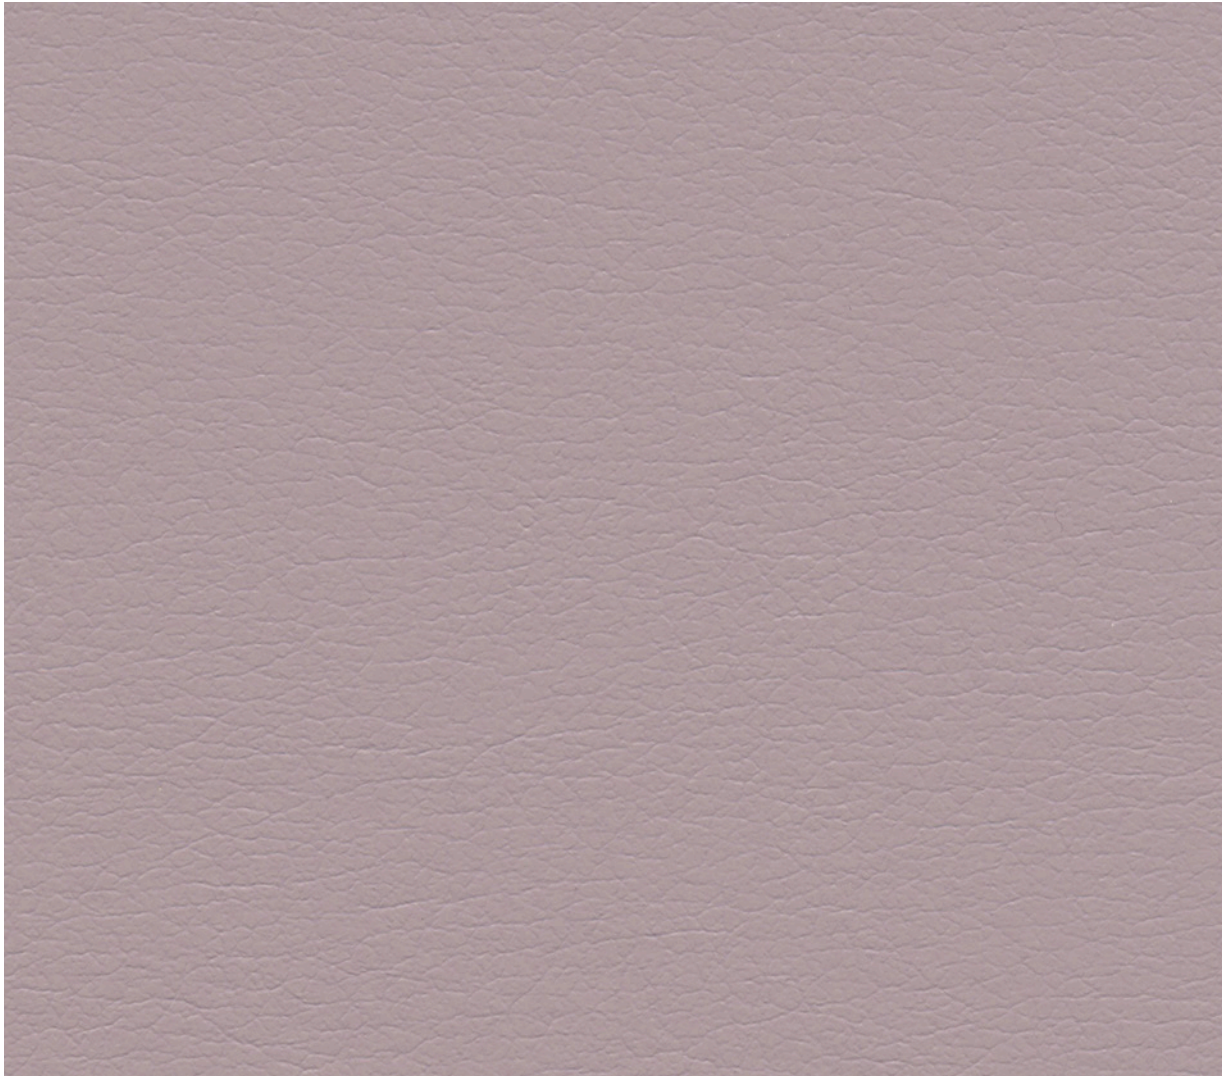

607-9348 Dusty Mauve



607-3686 Sweet Cream



607-3687 Sand Bar




607-9348 Dusty Mauve




607-6504 Harbor Fog




607-2743 Ocean Mist



607-3651 Dark Walnut



607-3652 Clay Brown



607-6505 Storm Grey



607-6065 Black Ice



607-2742 Blue Note



# Ultraleather Pro IFR

## Application

Interior Upholstery:

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
50% Modacrylic, 50% Rayon Backing

### Weight:

Approx. 350 Grams Per Square Metre

### Thickness:

Approx. 0.80 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

BS EN ISO 12947-2 / 120,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

### Tensile Strength:

BS EN ISO 1421

## Colorfastness

Light:

ISO 105 B02, Grade 6

## Flammability Requirements

These fabrics have been shown to perform under the fire test conditions of:

- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS EN 1021 Parts 1 & 2 (Cig & Match)
- IMO FTPC Part 8

## Ultraleather Pro IFR Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

