


# Montage — Uf Select®

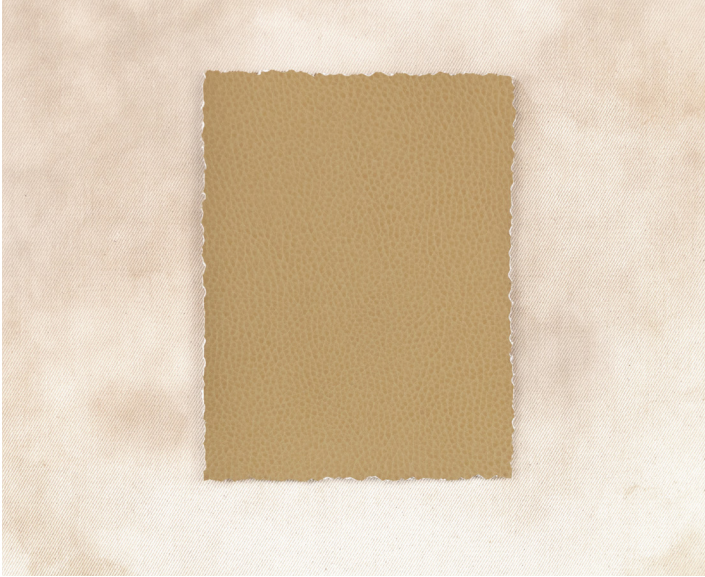

Artist-inspired tones and textures. An array of timeless and on-trend hues. Quality and comfort endorsed by Ultrafabrics. Uf Select brings it all together — with faster delivery and competitive pricing.

With a naturally distressed surface reminiscent of a collage, **Montage** has a weathered texture that's soft and rich. Rooted in timely neutrals, its artist-inspired color selection encompasses warm, saturated organic tones.

- 01** Artisanal quality that honors handicraft techniques
- 02** Quick Ship available in select colors up to 100 yards (US only)
- 03** Crafted in North America
- 04** Balances comfort, durability, and price
- 05** Polycarbonate blend provides excellent durability
- 06** Easy cleaning and care
- 07** PFAS free
- 08** No FR additives
- 09** REACH compliant
- 10** 10 weeks hydrolysis resistance
- 11** 200,000 double rubs (Wyzenbeek), 150,000 rubs (Martindale)
- 12** Bleach cleanable (1:5 bleach/water solution)

# Montage — Uf Select®

## Application

Interior Upholstery

## General Specifications

<b>Composition</b>	Polycarbonate Blended Surface   65% Polyester, 35% Cotton Backing
<b>Weight</b>	Approx. 12.53 oz. Per Square Yard   Approx. 425 Grams Per Square Metre
<b>Thickness</b>	Approx. 0.95 Millimetres
<b>Width</b>	54 Inches   137 Centimetres
<b>Repeat</b>	None

## Performance

<b>Abrasion</b>	ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)*   BS EN ISO 12947-2 / 150,000 Rubs (Martindale)* *meets or exceeds
<b>Hydrolysis</b>	10 Weeks   ASTM D3690 Sect. 6.11 (Hydrolytic Stability)   ISO 1419 Method C (Accelerated Ageing)
<b>Adhesion of Coating</b>	ASTM D751
<b>Tear Strength</b>	ASTM D2261
<b>Breaking Strength</b>	ASTM D751
<b>Tensile Strength</b>	BS EN ISO 1421

## Colorfastness


<b>Light</b>	AATCC 16.3, 200 Hours, Grade 4   ISO 105 B02, Grade 6
<b>Crocking</b>	AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:  
BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.



[ultrafabricsinc.com](https://ultrafabricsinc.com)  
Ultrafabrics® and logo, and Uf Select® are registered  
trademarks of Ultrafabrics Inc. Made in Mexico.

