


Brisa Distressed — Ultrafabrics

Brisa Distressed features a rustic appeal complemented by a palette of earthy hues. Delivering the breathable softness, acoustic properties, and superior durability of Brisa, Distressed adds a relaxed element to any interior.

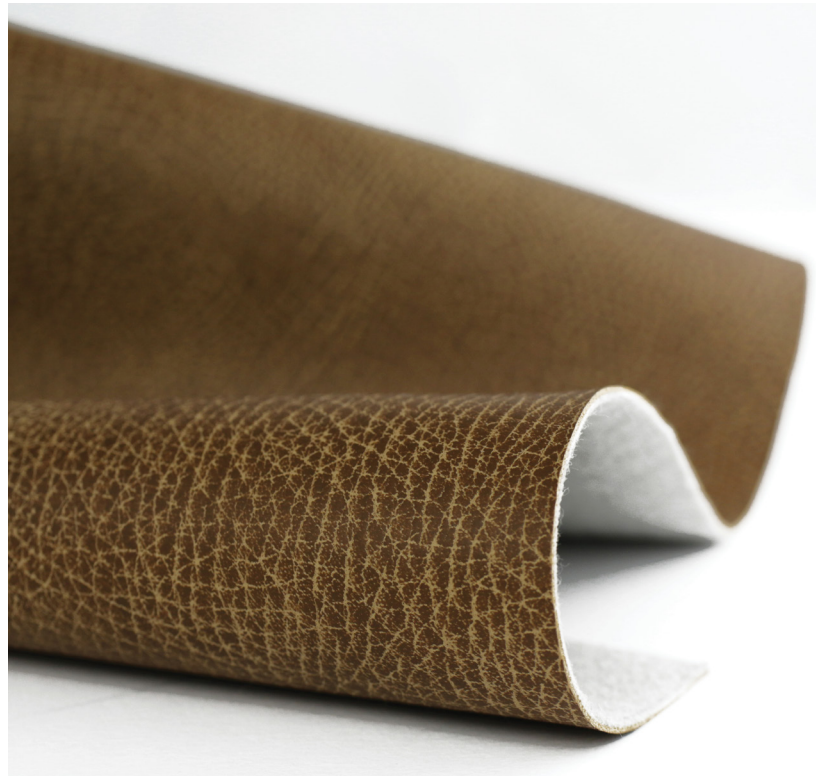


-
- Superior durability – industry-leading 16 weeks hydrolysis results
 - Backcloth contains recycled polyester and responsibly sourced rayon. Each linear yard of Brisa Distressed contains 8 recycled plastic bottles.
 - 300,000 double rubs (Wyzenbeek), 160,000 rubs (Martindale)
 - Breathable technology promotes airflow for ultimate seating comfort
 - Bleach cleanable (1:5 bleach/water solution)
 - Notable acoustic properties, when paired with Novawall acoustical wall systems.*

An intelligent solution – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel, and performance matter.

* Only in North America



Acoustics*



Breathable
Comfort



Responsible
Innovation

Brisa Distressed from Ultrafabrics

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America



ultrafabricsinc.com

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

7/23

