


Lino — Uf Select®

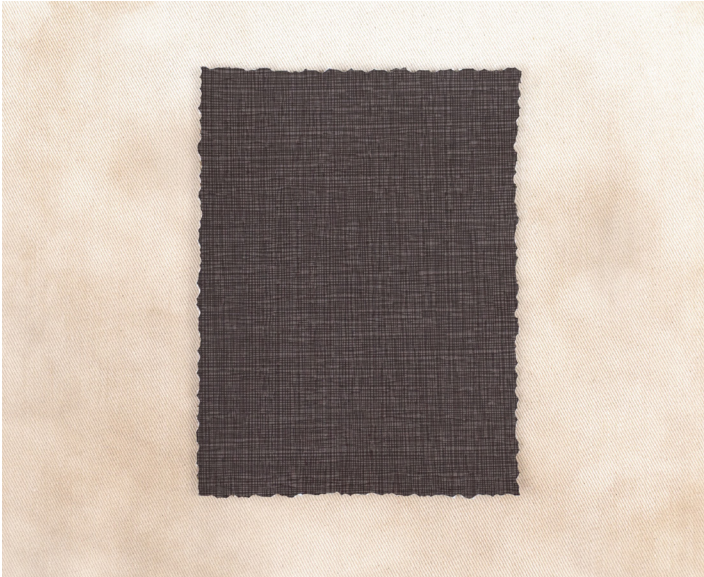

Artist-inspired tones and textures. An array of timeless and on-trend hues. Quality and comfort endorsed by Ultrafabrics. Uf Select brings it all together — with faster delivery and competitive pricing.

Inspired by finely-cut linoleum printing, **Lino** emulates a textile weave with its refined crosshatch design. Its textural aesthetic is brought to life through an assortment of foundational neutrals and on-trend colors ranging from classic blues to fresh greens that pop.

- 01** Artisanal quality that honors handicraft techniques
- 02** Crafted in North America
- 03** Balances comfort, durability, and price
- 04** Polycarbonate blend provides excellent durability
- 05** Easy cleaning and care
- 06** PFAS free
- 07** No FR additives
- 08** REACH compliant
- 09** 10 weeks hydrolysis resistance
- 10** 200,000 double rubs (Wyzenbeek), 150,000 rubs (Martindale)
- 11** Bleach cleanable (1:5 bleach/water solution)
- 12** Does not contain any Red List chemicals

Lino — Uf Select®

Application

Interior Upholstery

General Specifications

Composition	Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing
Weight	Approx. 13.1 oz. Per Square Yard Approx. 445 Grams Per Square Metre
Thickness	Approx. 0.95 Millimetres
Width	54 Inches 137 Centimetres
Repeat	None

Performance

Abrasion	ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* BS EN ISO 12947-2 / 150,000 Rubs (Martindale)* *meets or exceeds
Hydrolysis	10 Weeks ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)
Adhesion of Coating	ASTM D751
Tear Strength	ASTM D2261
Breaking Strength	ASTM D751
Seam Strength	ASTM D751 (Tack Tear)
Tensile Strength	BS EN ISO 1421

Colorfastness

Light	AATCC 16.3, 200 Hours, Grade 4 ISO 105 Bo2, Grade 6
Crocking	AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements*

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:
BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.

ultrafabricsinc.com

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.

8/25

