


Eco Tech — Ultrafabrics




394-5757 Moonstone

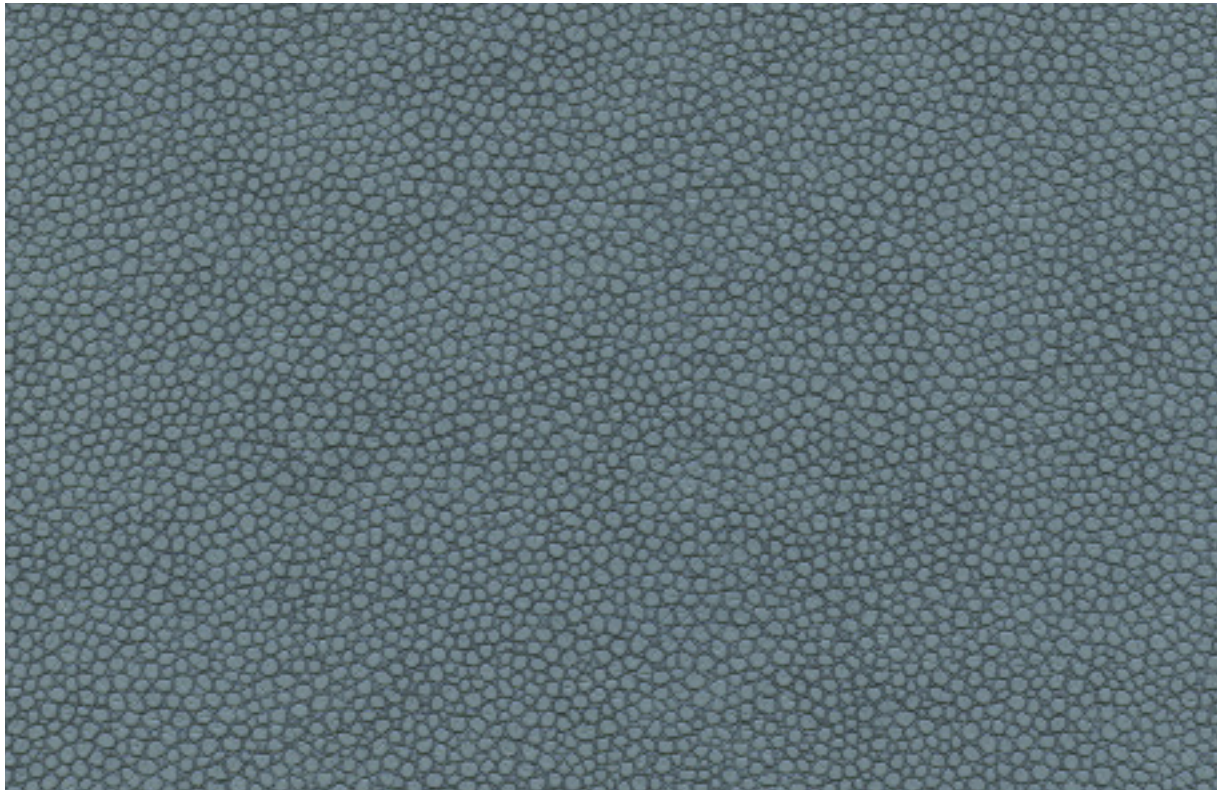


394-6540 Whisper



394-3801 Gypsum




394-4431 Gecko



394-4408 Komodo




394-3622 Limestone



394-4531 Pacifica



394-5777 Coal



394-3709 Brownstone



394-7243 Cadet



Eco Tech from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface

100% Reinforced Rayon Backing

Weight:

Approx. 10 oz. Per Square Yard

Approx. 340 Grams Per Square Metre

Thickness:

Approx. 1.0 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 150,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Colorfastness

Light Fastness: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.

