

Mokume — Ultrafabrics




556-2583 Waterfall

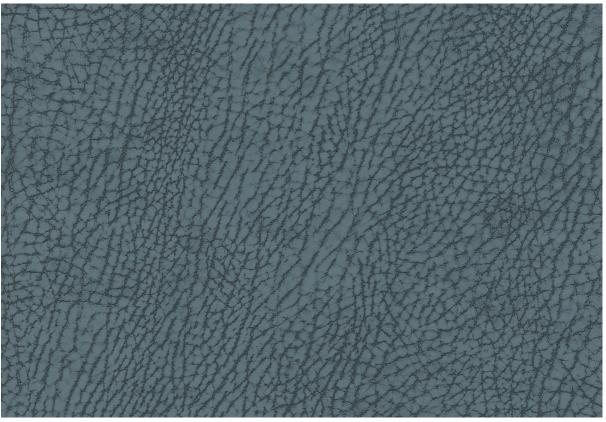


556-5960 Sidewalk




556-3254 Sunlight




556-3253 Wild West




556-2583 Waterfall







556-5961 Concrete



556-5963 Grey Jay



556-3252 Tiki Hut



556-5955 Jurassic




556-3402 Treehouse



556-3401 Katalox



556-2584 Starry Night




556-2586 Jungle





556-2585 Ocean Air





Mokume from Ultrafabrics

Applications

Interior Upholstery, Vertical Surfaces

General Specifications

Composition: 100% Polycarbonate Polyurethane Surface 65% Polyester, 35% Rayon Backing

Weight: Approx. 8.9 oz. Per Square Yard Approx. 300 Grams Per Square Metre

Thickness: Approx. 0.95 Millimetres

Width: 54 Inches / 137 Centimetres

Repeat: 11.02''V x 6.30''H / 280mm V x 160mm H

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)* BS EN ISO 12947-2 / 160,000 Rubs (Martindale)* *meets or exceeds

Hydrolysis:

14+ Weeks ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light Fastness:

Crocking:

AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6 AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) Class A
- CA TB 117 Pass
- FMVSS 302 & 95/28 Annex IV Pass
- NFPA 260 Class 1
- UFAC Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)IMO FTPC Part 8
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America



