



Promessa — **Ultrafabrics**




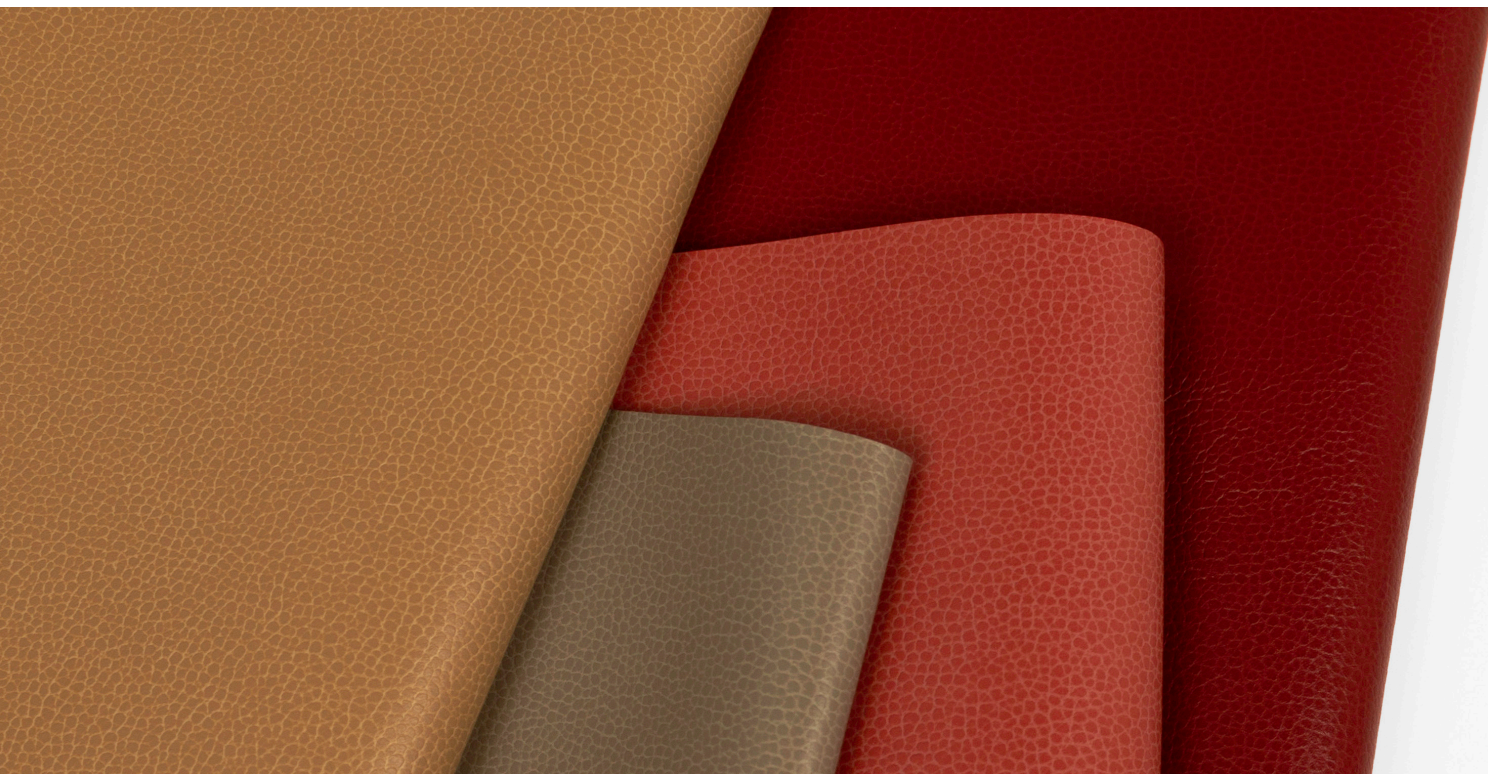


363-5354 Galaxy Fog




363-5715 Snow




363-5818 Ash



363-5817 Shale




363-5011 Battleship




363-5845 Ebony




363-3464 Tusk




363-3463 Cocoa



363-3785 Desert Taupe




363-3391 Sparrow




363-3037 Horsehair




363-3152 Parchment




363-3142 Camel




363-2695 Aquamarine




363-7239 Aqua Spring




363-3189 Barley




363-3145 Bronze




363-2604 Stone Blue




363-7309 Malibu




363-3786 Buttered Toffee




363-1444 Fireclay




363-2792 Lake Blue




363-4362 Old Lime




363-5258 Sun Shower




363-1387 Dogwood




363-2672 Corn Flour




363-4363 Olive Moss




363-3141 Fields




363-1443 Rumba Red




363-2680 Atlantic




363-7273 Aspen Green




363-3462 Woodpecker



363-9414 Merlot



363-9387 Moroccan Fig



Promessa from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% Rayon Backing

Weight:

Approx. 11.5 oz. Per Square Yard
Approx. 390 Grams Per Square Metre

Thickness:

Approx. 1.1 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Seam Strength: ASTM D751 (Tack Tear)

Tensile Strength: BS EN ISO 1421

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1
- AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Promessa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

