
# Marine — **Ultrafabrics**



Soft • Durable • Ease of Care • Bleach Cleanable

# Coast

# **Exterior Above Deck**

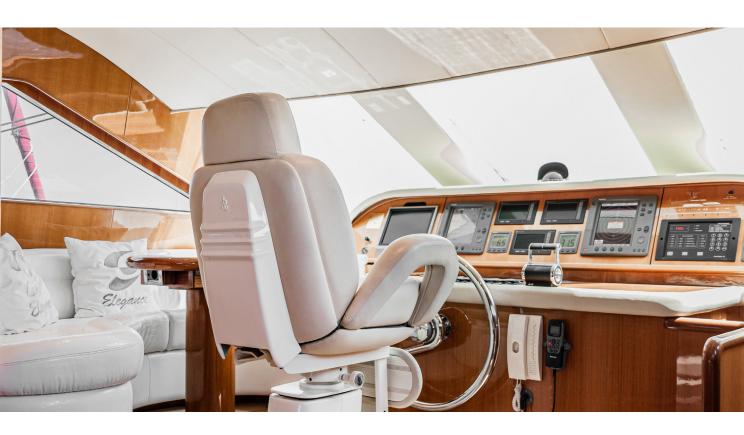





640-3880 Savanna



640-5968 Feather



640-2590 Raindrop



640-3881 Dusty Earth



640-6508 Dolphin



640-2579 Glacial



640-3797 Conch



640-3837 Bungalow



640-6086 Walrus Grey



640-4338 Stem Green



640-0042 Beacon



640-3890 Cabana



640-3879 Terra



640-2776 Naval Blue



640-7230 Calypso

# **Pumice**



497-0047 White Shore



497-0017 Whitewater



497-6533 Hail



497-6534 Anchor Gray



Pumice

497-3260 Seahorse



497-4018 Oar



497-5969 Propeller



497-2778 Hightide

# Ultrafabrics for Marine





For more than twenty years, Ultrafabrics has provided durable, high-quality materials for yachts, cruisers, cruise ships, and pontoon boats. With options for above and below deck applications like helm, fly-bridges, seating, lounges, and wallcoverings, Ultrafabrics for Marine are designed to set sail.





# **Interior Below Deck**

Select examples of interior grains. For complete list of collections, colorways and specs please visit our website.



Outdoor Living — Designed to defend against mildew, bacteria, and other microbes, these durable materials withstand fading and spotting to provide lasting defense, no matter the season or forecast.

Antimicrobial — Features an EPA-registered antimicrobial agent that inhibits the growth of bacteria, while providing additional deterioration protection to the surface.





## Marine from Ultrafabrics

Specifications below for Coast & Pumice

## **Application**

Interior Upholstery, Exterior Upholstery

## **General Specifications**

## Composition:

100% Polycarbonate Polyurethane Surface 65% Polyester, 35% Rayon Backing

#### Weight

Approx. 11.2-11.5 oz. Per Square Yard Approx. 380-390 Grams Per Square Metre

#### Thickness:

Approx. 1.1-1.15 Millimetres

#### Width:

54 Inches / 137 Centimetres

#### Repeat:

None

#### **Performance**

#### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*
BS EN ISO 12947-2 / 180,000-200,000 Rubs (Martindale)\*

\*meets or exceeds

## Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Antibacterial: AATCC 147

Antimicrobial: ASTM E2180

Anti-mildew: ASTM G21

**Cold Crack:** FTM 5874 / CFFA 6a **Blocking:** ASTM D751, 89-93

## Colorfastness

**Light:** ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:AATCC 162, Class 4-5Perspiration:AATCC 15, Class 5

Sea (Salt) Water: AATCC 106, Class 4-5

## Flammability Requirements

· ASTM E84 (Adhered) - Class A

• CA TB 117-2013 - Pass

FMVSS 302 - Pass

NFPA 260 - Class 1

• UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

ASTM E84 (Unadhered)

• IMO FTPC Part 8

• BS EN 1021 Parts 1 & 2

• BS 5852 Source 0,1 & 5

(Cig, Match & Crib 5)

Only Coast and Pumice can be used for exterior above deck applications. Cushions should not remain wet or be covered when wet, as this will increase the chances of mildew growth. Our Outdoor Living products perform best when paired with an open cell, reticulated, quick drying foam and/or a waterproof barrier between the fabric and foam. Utilizing air vents and/or a mesh, open weave insert are also options. Best stored in a dry, well-ventilated area.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



