


Montage — Uf Select®

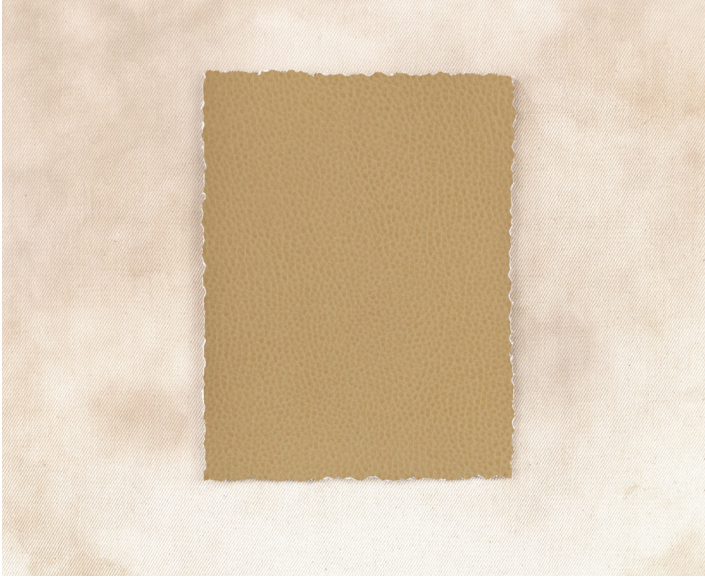

Uf Select features artist-inspired colors, patterns, and textures backed by the quality and performance of Ultrafabrics. Crafted in collaboration with our North American partner mill, it offers price-conscious products with shorter turnaround times.

Montage offers a natural and subtly distressed look with its weathered, rich surface that mimics a collage.

- 01** Artisanal quality that honors handicraft techniques
- 02** Quick Ship available in select colors up to 100 yards (US only)
- 03** Crafted in North America
- 04** Balances comfort, durability, and price
- 05** Polycarbonate blend provides excellent durability
- 06** Easy cleaning and care
- 07** PFAS free
- 08** No FR additives
- 09** REACH compliant
- 10** 10 weeks hydrolysis resistance
- 11** 200,000 double rubs (Wyzenbeek), 150,000 rubs (Martindale)
- 12** Bleach cleanable (1:5 bleach/water solution)

Montage — Uf Select®

Application

Interior Upholstery

General Specifications

| | |
|--------------------|--|
| Composition | Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing |
| Weight | Approx. 12.53 oz. Per Square Yard Approx. 425 Grams Per Square Metre |
| Thickness | Approx. 0.95 Millimetres |
| Width | 54 Inches 137 Centimetres |
| Repeat | None |

Performance

| | |
|----------------------------|---|
| Abrasion | ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* BS EN ISO 12947-2 / 150,000 Rubs (Martindale)* *meets or exceeds |
| Hydrolysis | 10 Weeks ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing) |
| Adhesion of Coating | ASTM D751 |
| Tear Strength | ASTM D2261 |
| Breaking Strength | ASTM D751 |
| Tensile Strength | BS EN ISO 1421 |

Colorfastness


| | |
|-----------------|---|
| Light | AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6 |
| Crocking | AATCC 8, Grade 4-5 Wet & Dry |

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 & 95/28 Annex IV - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | CA AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:
BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.



ultrafabricsinc.com
Ultrafabrics® and logo, and Uf Select® are registered
trademarks of Ultrafabrics Inc. Made in Mexico.

