


# Ultraleather Pro — Ultrafabrics

**Ultraleather Pro** is crafted with passion and purpose. Imbued with optimal durability, protection, and ease of care attributes, Ultraleather Pro maintains the Ultraleather reputation as the softest in its class and is infused with comfort and power combined. Added features include exceptional abrasion resistance, repellency of most stubborn stains like ink, denim dye, red wine, mustard, and iodine-based liquids, along with EPA-registered antimicrobial protection. An extensive color palette provides numerous options for upholstery applications.

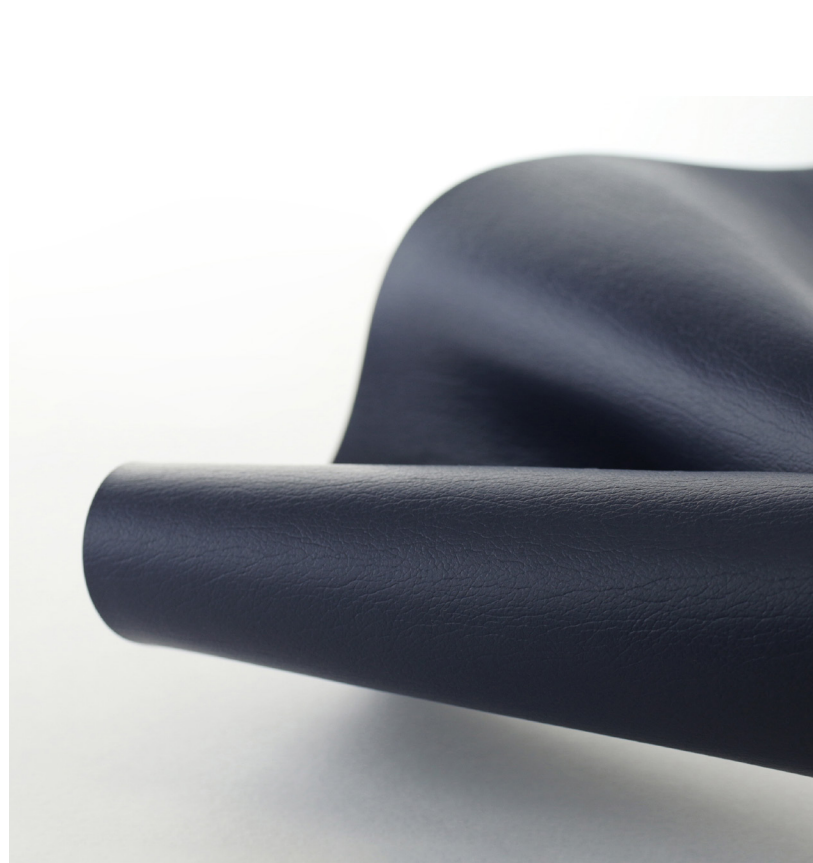

- 
- Superior durability – industry-leading 14+ weeks hydrolysis results
  - Reinforced rayon backing containing TENCEL™ Modal fibers
  - 500,000 double rubs (Wyzenbeek), 200,000 rubs (Martindale)
  - Bleach cleanable (1:5 bleach/water solution)
  - EPA-registered antimicrobial protection does not contain triclosan and triclocarban
  - SCS Indoor Advantage Gold Certification

**An intelligent solution** – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel and performance matter.



Antimicrobial



Ink & Stain Resistant

# Ultraleather Pro from Ultrafabrics

## Application

Interior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
100% Reinforced Rayon Backing  
containing TENCEL™ Modal fibers

### Weight:

Approx. 9.7 oz. Per Square Yard  
Approx. 330 Grams Per Square Metre

### Thickness:

Approx. 0.95 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Antimicrobial: ASTM E2180

Tensile Strength: BS EN ISO 1421

## Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4  
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

## Ultraleather Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim\*
- Red Wine

\* Removal of denim dye may vary depending on the period of time the stain sets in. While Ultraleather Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



TENCEL™ is a trademark of Lenzing AG

[ultrafabricsinc.com](http://ultrafabricsinc.com)

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.  
1/22

