


Ultraleather Pro — Ultrafabrics

Ultraleather Pro is crafted with passion and purpose. Imbued with optimal durability, protection, and ease-of-care, it maintains the Ultraleather reputation as the softest in its class. Ultraleather Pro is enhanced with exceptional abrasion resistance and our trusted stain repellent. An extensive color palette provides bountiful options for upholstery applications.

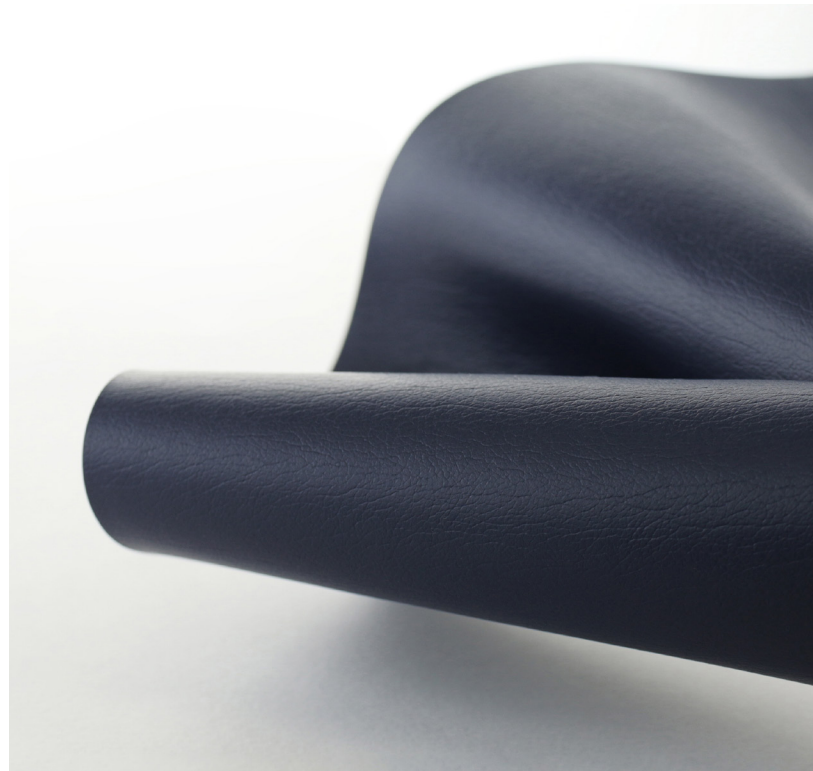

-
- Superior durability – industry-leading 16 weeks hydrolysis results
 - Contains 50% renewable resource: TENCEL™ Modal fibers in rayon backcloth
 - 500,000 double rubs (Wyzenbeek), 200,000 rubs (Martindale)
 - Enhanced resistance to tough stains including ballpoint pen, denim dye, and ketchup
 - Bleach cleanable (1:5 bleach/water solution)
 - SCS Indoor Advantage Gold Certification

An intelligent solution – the Ultrafabrics family of performance fabrics highlights boundary-pushing innovation where looks, feel, and performance matter.



Ink & Stain
Resistant

Ultraleather Pro from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% Reinforced Rayon Backing
containing TENCEL™ Modal fibers

Weight:

Approx. 9.7 oz. Per Square Yard
Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 500,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

Ultraleather Pro Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim*
- Red Wine

* Removal of denim dye may vary depending on the period of time the stain sets in. While Ultraleather Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



TENCEL™ is a trademark of Lenzing AG

ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.
7/23

