


Acoustics — Ultrafabrics

Unwanted noise is a nuisance. Our **acoustic** materials feature sound-absorbing technology designed to minimize it. Whether you are looking to improve speech intelligibility or increase concentration capacity, these fabrics enhance any environment.

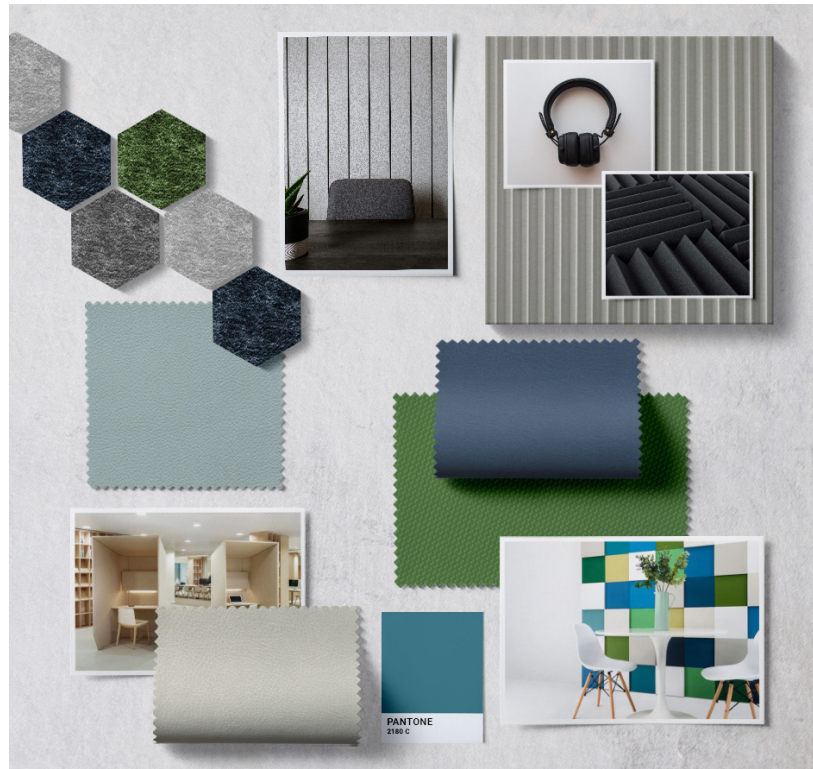

Featured Collections —

Brisa | Fresco | Mokume | Spectra | Brisa Distressed

- Premium, 100% polycarbonate construction
- Withstands commonly used cleaners, disinfectants, and bleach solutions
- Suitable for vertical applications including ceiling and wall panels, space dividers and furniture
- Inherently stain resistant
- 0.65 NRC Rating to ASTM C423
- Does not pill, warp, or sag for a flawless look year after year
- Inherently passes flammability test ASTM E84 Adhered Class A
- SCS Indoor Advantage Gold Certified and REACH compliant

A sound solution.

We are proud to partner with Novawall. Made in the USA, NOVAWALL® is the clear-cut favorite for acoustical stretched fabric wall and ceiling installations. Their patented track system, designed to provide an acoustical solution to the varied environments of modern design, adapts to almost any environment.


*Acoustic solution currently not available in Canada, the UK, Europe, or the Middle East.



Acoustics[†]



Antimicrobial^{††}



Breathable
Comfort

Acoustics

Application

Interior Upholstery, Vertical Surfaces

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard
Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

8" V x 10.5" H / 203mm V x 267mm H (Brisa Distressed)
5.51" V x 3.54" H / 140mm V x 90mm H (Fresco)
11.02" V x 6.30" H / 280mm V x 160mm H (Mokume)

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D5034

Tensile Strength: BS EN ISO 1421

Air Permeability: ASTM D737

Antimicrobial^{††}: ASTM E2180

Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2*
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

*Only pertains to Brisa

†Only in North America

††Only pertains to Fresco



INDOOR ADVANTAGE GOLD
FURNITURE

ultrafabricsinc.com

Ultrafabrics® and logo and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.

11/21

