



Ultraleather Pro IFR — Ultrafabrics

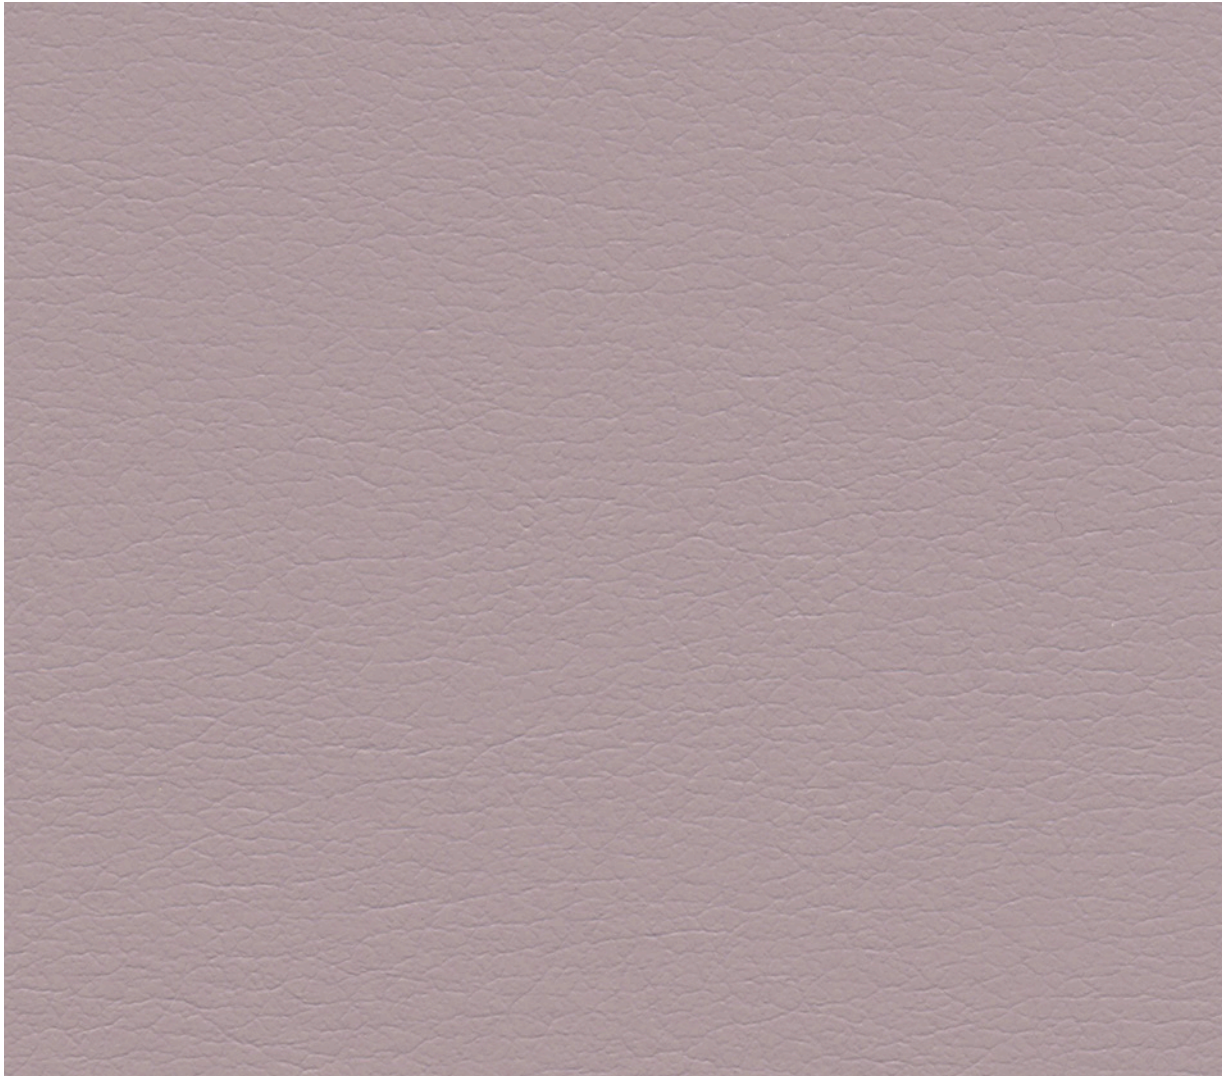

607-9348 Dusty Mauve



607-3686 Sweet Cream



607-3687 Sand Bar




607-9348 Dusty Mauve




607-6504 Harbor Fog




607-2743 Ocean Mist




607-3651 Dark Walnut



607-3652 Clay Brown



607-6505 Storm Grey



607-6065 Black Ice



607-2742 Blue Note



Antimicrobial



Ink & Stain Resistant

Ultraleather Pro IFR

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
50% Modacrylic, 50% Rayon Backing

Weight:

Approx. 350 Grams Per Square Metre

Thickness:

Approx. 0.80 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

BS EN ISO 12947-2 / 120,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Tensile Strength:

BS EN ISO 1421

Antimicrobial:

ASTM E2180

Colorfastness

Light Fastness:

ISO 105 B02, Grade 6

Flammability Requirements

These fabrics have been shown to perform under the fire test conditions of:

- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- BS EN 1021 Parts 1 & 2 (Cig & Match)
- BS 5867 Part 2 Type B
- IMO FTPC Part 8

Ultraleather Pro IFR Resists:

- Ballpoint ink
- Blood
- Mustard and Ketchup
- Betadine
- Denim*
- Red Wine

* Removal of denim dye may vary depending on the period of time the stain sets in. While Pro offers excellent protection, full removal is not guaranteed.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

