




# Ultratech™ | Wired

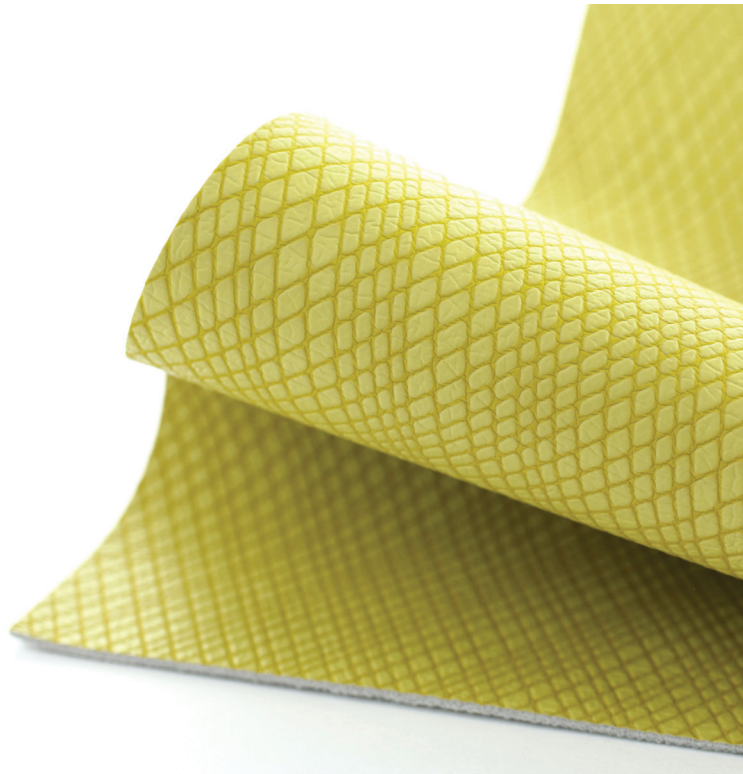

Introducing **Wired**, the newest collection in the Ultratech™ family. Featuring a pattern inspired by technology, Wired highlights a unique hand and matte finish that makes a dramatic statement.

Taking note of the present and living in the moment through our sensorial experiences, **Ultratech™ | Wired** expresses how touch and color are interwoven. Its unique appeal encourages tactile interaction that must be felt to be believed. Additionally, emotional connections to the physical world are created aesthetically with subtle layering of color which provides depth of design, while parallel and perpendicular lines create a sense of movement.

Features include:

- Enduring performance (14+ weeks hydrolysis results)
- Ultimate softness for an unparalleled seating experience, created by our innovative engineering process
- Optimal stain protection and ease of care
- GREENGUARD Gold Certification
- Meets Healthier Hospitals Safer Chemical Challenge, V2.0

**Wired's** prominent color palette, combining twelve fresh and timeless hues, offers wide-ranging design possibilities.

# Ultratech™ | Wired

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Polyester, 35% Rayon Backing

### Weight:

Approx. 10.8 oz. Per Square Yard  
Approx. 360 Grams Per Square Metre

### Thickness:

Approx. 1.0 Millimetres

### Width:

54 Inches / 137 Centimetres

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS 2543 / 200,000 Rubs (Martindale)\*

\*meets or exceeds

### Hydrolysis:

14+ Weeks  
ASTM D3690-02 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

### Adhesion of Coating:

ASTM D751

### Tear Strength:

ASTM D2261

### Breaking Strength:

ASTM D5034

## Colorfastness

### Light Fastness:

AATCC 16.3, 200 Hours, Grade 4-5

### Crocking:

AATCC 8, Class 5 Wet & Dry

## Flammability

### F/R Rating:

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

### Other Tests\*:

- ASTM E84 (Unadhered)
- BS 5852 PT 0, 1 & 5 (Crib 5)
- BS 5867 Part 2 Type B
- BS 7175
- California Technical Bulletin 133
- FAR Specifications
- IMO A.652 (16)
- NFPA 701

\*These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under these fire test conditions.

## Earth Friendly

### • GREENGUARD Gold Certified

- Meets stringent chemical emission limits for various VOCs (ex. Formaldehyde)
- Promotes healthier indoor air quality
- Contributes towards satisfying credits under LEED® and BIFMA
- Compliant with California Section 01350

### • Meets Healthier Hospitals Safer Chemicals Challenge, V2.0

- Compliant with Prop 65
- No Bisphenol A (BPA)
- No Conflict Minerals
- No Flame Retardants (Halogenated, Brominated: ex. PBDEs)
- No Heavy Metal Stabilizers
- No PFCs (Perfluorinated Chemicals)
- No Plasticizer Phthalates
- No POPs (Persistent Organic Pollutants)
- No PVC (Polyvinyl Chloride)
- No toxic by-products
- Over 99% of solvents recaptured and recycled

For more information on our fabrics, cleaning and care instructions, please visit our website.



PRODUCT  
CERTIFIED FOR  
LOW CHEMICAL  
EMISSIONS:  
UL.COM/GG  
UL 2818



A PRACTICE GREENHEALTH PROGRAM

ultrafabricsinc.com  
Ultrafabrics® and logo, and Ultratech™ are trademarks of Ultrafabrics Inc. Made in Japan.

7/18

